

07-20-00

A

IBM Docket No. RSW9-2000-0081-US1

**In the United States Patent and Trademark Office
Patent Application Transmittal**

Transmitted herewith for filing is the Patent Application of:

Inventors(s): J. H. King, S. D. Kirkman, D. J. Labrecque, L. H. Overby, Jr., and S. W. Pogue

For: Technique for Handling Subsequent User Identification and Password
Requests with Identity Change Within a Certificate-Based Host Session

Enclosed are

53 pages of specification, including 20 claims, plus 9 sheets of *formal* drawings.

X An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.

A certified copy of a/an application.

X Declaration and Power of Attorney.

PTO-1449 & references

X A return post card

Other:

Filing Fee Calculation (For Other Than Small Entity)

Basic Fee:						\$690.00
Claims Fees:	Filed	Limit	Extra		Rate per Extra	
Total claims:	20	20	0		\$18.00	\$0.00
Independent claims:	3	3	0		\$78.00	\$0.00
Multiple Dependent Claim Presented					\$260.00	\$0.00
Total						\$690.00

Please charge Deposit Account **09-0461** for the **Total** set forth above. The Commissioner is authorized to charge payment of any additional filing fees required under 37 CFR §1.16 and any patent application processing fees under 37 CFR §1.17 or to credit any overpayment to the identified account. A duplicate copy of this sheet is enclosed.

Express Mail Certificate

Express Mail Label No: EK956411810US

Date: July 19, 2000

I hereby certify that I am depositing the papers identified above with the U.S. Postal Service "Express Mail Post Office to Address" service on the above date, addressed to the Commissioner of Patents and Trademarks, Washington, DC 20231

Dianne Lane
Dianne Lane

BY: Jeanine S. Ray-Yarletts

Jeanine S. Ray-Yarletts

Attorney of Record Reg. No. 39,808

Date: July 19, 2000

IBM Corporation T81/062
Intellectual Property Law
PO Box 12195
Res. Tri. Park, NC 27709

Telephone: 919-543-2541 FAX 919-254-4330

EXPRESS MAIL LABEL NO. <u>EK956411810US</u>	DATE OF DEPOSIT: <u>July 19, 2000</u>
I hereby certify that this paper and fee are being deposited with the United States Postal Service Express Mail Post Office to Addressee service under 37 CFR §1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.	
<u>Dianne Lane</u> NAME OF PERSON MAILING PAPER AND FEE	<u>Dianne Lane</u> SIGNATURE OF PERSON MAILING PAPER AND FEE

INVENTORS: Julie H. King; Susan D. Kirkman; Daniel J. Labrecque;

Linwood H. Overby, Jr.; Steven W. Pogue

**Technique for Handling Subsequent User Identification and
Password Requests with Identity Change within a Certificate-Based
Host Session**

BACKGROUND OF THE INVENTION

5 Related Inventions

The present invention is related to U. S. Patent _____ (serial number 09/466,625, filed 12/17/1999), titled "Providing End-to-End User Authentication for Host Access Using Digital Certificates", and U. S. Patent _____ (serial number 09/_____, filed concurrently herewith), titled "Technique for Handling Subsequent User Identification and Password Requests within a

Certificate-Based Host Session”, both of which are commonly assigned to the International Business Machines Corporation (IBM) and which are hereby incorporated herein by reference.

Field of the Invention

5 The present invention relates to a computer system, and deals more particularly with a method, system, and computer program product for handling user identification and password requests for user sign-on with an identity change, where these requests occur during a host access session which is authenticated using digital certificates, after an initial user sign-on has already completed.

Description of the Related Art

10 One of the challenges facing information services (“IS”) professionals today is the difficulty of providing secure access to legacy mainframe host data and applications from modern personal computer-based (“PC-based”) applications. As more large companies move to provide business integration and self-service on the World Wide Web (hereinafter, “Web), there is most often data that is crucial to this movement, but which is based on (and is only accessible through) legacy mainframe host applications. These host applications and their data have, from their origin, been typically protected through the use of the program product commonly referred to as “RACF” (Resource Access Control Facility) or other similar mainframe-based security systems. (“RACF” is a registered trademark of the IBM Corporation.) These mainframe-based security systems typically require a user identification and password in order to gain access to the protected applications and data. Therefore, when a user tries to access data or legacy

15

20

applications on a host mainframe from a client workstation over a network connection, they normally must provide a separate user identification and password to the host application to satisfy the security requirements of the host security system in addition to the user identification and password they use to access the modern environments (e.g. to access the Internet or Web).

5 This double entry of identifying information is not only redundant but tedious for the user as well.

With the wide-spread use of SSL (Secure Sockets Layer) and certifiable digital certificates for providing security in today's PC-based computing environments, there is a desire to use a client certificate as the basis for a "single system sign-on" to all of a user's Internet-based applications. This includes applications that provide access to legacy host applications and/or data such as IBM's Host-On-Demand, Personal Communications, and Host Publisher products. The way in which users identify themselves to these products should be consistent with how they do so with other Web applications. This will enable minimizing the number of different user identifications and passwords a user must create and remember, and reduce the administrative burden of maintaining security (e.g. by reducing the number of requests for an administrator to reset a forgotten password) for password-protected applications and data.

Digital certificates may be used to authenticate entities, as is well known in the art. U. S. Patent _____ (serial number 09/064,632, filed 12/10/98), which is titled "Certificate Based Security in SNA Data Flows", teaches a technique whereby digital certificates are transported in appropriate Systems Network Architecture ("SNA") data flows between a client and a host for

identifying the user to the host application, but this existing technique requires those host programs which authenticate the user to RACF (or other host access control facility) to be modified to use the certificate instead of the traditional user ID (user identifier) and password. This requires an enterprise to upgrade each of its application subsystems in order to achieve the benefits. So for some enterprises, the previous approach may be impractical and unacceptable.

Related U. S. Patent _____, titled "Providing End-to-End User Authentication for Host Access Using Digital Certificates" and referred to hereinafter as "the related invention", discloses a technique for using digital certificates to authenticate a client in order to allow the client to access legacy host applications and/or data which are protected by a security system such as RACF, where these host applications or systems for managing host data (including legacy database systems) typically require a user identification and password that is supplied separate from that used for the client's sign-on process to the modern environment. Thus, the related invention enables the user to access a legacy host application and/or legacy host data with a single sign-on (i.e. without re-identifying himself), and does not require modifications to the legacy software.

In the related invention, SSL or a similar security protocol is used to establish a connection between a client device and either a Web application server or a Telnet 3270 ("TN3270") server. The client's digital certificate is required when establishing the SSL connection, according to the prior art SSL specification, to enable the Web application server or TN3270 server to authenticate the client. The certificate is then cached at the server, according

to the related invention, and used to authenticate the client to the host-based, legacy security system. Once the security system has successfully authenticated the client, it may return a password or password substitute. (The password substitute is called a "passticket" when using the RACF security system, where a passticket is a relatively short-lived credential that is dynamically generated after a user's identity has been authenticated.) Rather than requiring the user to re-enter his identifier and password to communicate with the protected legacy host system, the Web application server or TN3270 server provides the user's ID and the passticket to the host system, enabling the user to be transparently yet securely logged on to the host system. (The related invention discloses the Web application server or TN3270 server alternatively providing the host system with a user ID and an actual password which has been authenticated by a security system, rather than a user ID and passticket, for those environments in which the passticket concept does not exist.)

However, the related invention addresses the capability only for an initial sign-on sequence to a host application. There may be cases where a subsequent sign-on is required. For example, a particular host application may process transactions that have special security needs (such as heightened security requirements), and which require the sign-on process of obtaining and verifying the user's identification and password again in the context of a special transaction. Or, a legacy application may be written such that it repeats the sign-on process to re-verify the user after occurrence of particular situations, such as an outage of some sort, a dormancy in session activity, etc. As another example, the user may wish to change from using one legacy host application to using another legacy application. Each legacy application typically begins by

5 sending a sign-on screen to the user, with the intent of prompting the user to enter his user ID and password. The related invention does not provide a technique that enables a subsequent sign-on to be processed without requiring the user to re-identify himself during the scope of a single secure session (e.g. without tearing down the SSL session and repeating the secure session establishment), nor is this capability available in the prior art.

Furthermore, there may be cases where it would be desirable to provide different sign-on credentials during a secure host access session, following the initial sign-on. As an example, it may be necessary for the current legacy host application user's supervisor to sign on to the legacy application, such as when a special transaction requiring supervisory authority is to be performed. Or, it may happen that different security credentials are required for a user when he wishes to change from one legacy host application to another. As another example, there may be applications for which it is necessary or desirable to force the user to re-authenticate himself by providing his security credentials again (for example, by swiping his Smart Card through a Smart Card reader) at defined points, such as when a new application transaction begins. Because establishing a secure connection between the client and the TN3270 server or Web application server using a security protocol such as SSL is relatively expensive in terms of computation and networking resources, the performance overhead incurred in re-starting the session in order to supply a different certificate that signifies different user credentials makes this a less-than-optimal solution. Thus, a technique is needed which enables changing the user's credentials within the scope of an on-going secure session. Neither the prior art nor the related invention provide this capability.

Accordingly, what is needed is a technique that overcomes these limitations of the prior art.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a technique for processing a subsequent sign-on with changed credentials during a session that accesses legacy host applications and/or data in a distributed networking environment.

Another object of the present invention is to provide this technique using a certificate for authentication of the changed credentials that is different from a previously-submitted and previously-authenticated certificate.

A further object of the present invention is to provide this technique without requiring any modification to the existing legacy host applications.

Another object of the present invention is to provide a technique to enable changing from accessing one legacy host application to accessing another legacy host application which requires a different set of credentials, within the scope of a single secure session.

Yet another object of the present invention is to provide this technique without requiring the secure session to be restarted.

Still another object of the present invention is to provide a technique which enables a different user to access a legacy host application within the scope of a single secure session, after a former user has already been authenticated to use that host application.

Other objects and advantages of the present invention will be set forth in part in the description and in the drawings which follow and, in part, will be obvious from the description or may be learned by practice of the invention.

To achieve the foregoing objects, and in accordance with the purpose of the invention as broadly described herein, the present invention provides a computer program product, system, and method for enabling changed credentials to be provided and authenticated during a certificate-based host session. This technique comprises: processing a first sign-on during a secure session using a digital certificate; and processing a second sign-on during the same secure session using a second digital certificate for a second identity, wherein the second sign-on requests access to the same secure legacy host application or a different legacy host application by the same user or by a different user.

Processing the first sign-on further comprises: establishing the secure session from a client machine to a server machine using the digital certificate, wherein the digital certificate represents an identity of the client machine or a user thereof; storing the digital certificate or a reference thereto at the server machine; establishing a session from the server machine to a host system using a legacy host communication protocol; passing the stored digital certificate or the

reference from the server machine to a host access security system; authenticating, by the host access security system, the identity using the passed digital certificate or a retrieved certificate which is retrieved using the reference; using the passed or retrieved digital certificate to locate access credentials for the user; accessing a stored password or generating a password substitute representing the located credentials; and using the stored password or the generated password substitute to transparently complete the first sign-on to a secure legacy host application executing at the host system.

Processing the second sign-on further comprises: receiving a second sign-on request using the second digital certificate for the second identity; passing the second digital certificate or a second certificate reference from the server machine to the host access security system; authenticating, by the host access security system, the second identity using the passed second digital certificate or a second retrieved certificate which is retrieved using the second certificate reference; using, by the host access security system, the passed second digital certificate or the second retrieved certificate to locate second access credentials; accessing a second stored password or generating a second password substitute representing the second credentials; and using the second stored password or the second password substitute to transparently complete the second sign-on to the secure legacy host application executing at the host system or the different legacy host application.

The digital certificate is preferably an X.509 certificate, and the digital certificate reference and second certificate reference are preferably references to an X.509 certificate.

The communication protocol may be a 3270 emulation protocol, a 5250 emulation protocol, a Virtual Terminal protocol, etc. In the former case, the host access security system may be a Resource Access Control Facility (RACF) system.

Processing the first sign-on preferably further comprises: requesting by the legacy host application, responsive to establishing the session, first sign-on information for the user; responding to the request for first sign-on information by sending a first sign-on message with placeholders from the client machine to the server machine, the placeholders representing a user identification and a password of the user; and substituting a user identifier associated with the located access credentials and the stored password or the generated password substitute for the placeholders in the first sign-on message.

Processing the second sign-on preferably further comprises: requesting, by the legacy host application, second sign-on information for the second identity; responding to the request for second sign-on information by sending a second sign-on message with placeholders from the client machine to the server machine, the placeholders representing a different user identification and a different password of the second identity; and substituting the second user identifier associated with the second access credentials and the second stored password or the second password substitute for the placeholders in the second sign-on message. Processing the second sign-on may further comprise storing the second digital certificate.

The present invention will now be described with reference to the following drawings, in

which like reference numbers denote the same element throughout.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a computer workstation environment in which the present invention may be practiced;

5 Figure 2 is a diagram of a networked computing environment in which the present invention may be practiced;

Figure 3 depicts the format of an X.509 certificate that may be used with the preferred embodiments of the present invention;

Figure 4 illustrates message flows which enable a subsequent and transparent user sign-on to be provided during a certificate-based host session, according to a first preferred embodiment of the present invention which operates in a distributed computing environment using emulation software at a client device;

Figure 5 provides a textual version of protocol message flows which may be used to support this first preferred embodiment;

15 Figure 6 depicts the components which may be involved in an implementation of the first preferred embodiment;

Figure 7 illustrates flows which are similar to those of Figure 4, but which are used when operating in a Web Application environment;

Figure 8 illustrates message flows which enable changed user credentials to be provided during a certificate-based host session, according to a second preferred embodiment of the present invention which operates in a distributed computing environment using emulation software at a client device; and

Figure 9 provides a textual version of protocol message flows which may be used to support this second preferred embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 illustrates a representative workstation hardware environment in which the present invention may be practiced. The environment of Fig. 1 comprises a representative single user computer workstation 10, such as a personal computer, including related peripheral devices. The workstation 10 includes a microprocessor 12 and a bus 14 employed to connect and enable communication between the microprocessor 12 and the components of the workstation 10 in accordance with known techniques. The workstation 10 typically includes a user interface adapter 16, which connects the microprocessor 12 via the bus 14 to one or more interface devices, such as a keyboard 18, mouse 20, and/or other interface devices 22, which can be any user interface device, such as a touch sensitive screen, digitized entry pad, etc. The bus 14 also connects a display device 24, such as an LCD screen or monitor, to the microprocessor 12 via a

display adapter 26. The bus 14 also connects the microprocessor 12 to memory 28 and long-term storage 30 which can include a hard drive, diskette drive, tape drive, etc.

The workstation 10 may communicate via a communications channel 32 with other computers or networks of computers. The workstation 10 may be associated with such other computers in a local area network (LAN) or a wide area network, the workstation 10 can be a client in a client/server arrangement with another computer, etc. All of these configurations, as well as the appropriate communications hardware and software, are known in the art.

Fig. 2 illustrates a data processing network 40 in which the present invention may be practiced. The data processing network 40 may include a plurality of individual networks, such as wireless network 42 and network 44, each of which may include a plurality of individual workstations 10. Additionally, as those skilled in the art will appreciate, one or more LANs may be included (not shown), where a LAN may comprise a plurality of intelligent workstations coupled to a host processor.

Still referring to Figure 2, the networks 42 and 44 may also include mainframe computers or servers, such as a gateway computer 46 or application server 47 (which may access a data repository 48). A gateway computer 46 serves as a point of entry into each network 44. The gateway 46 may be preferably coupled to another network 42 by means of a communications link 50a. The gateway 46 may also be directly coupled to one or more workstations 10 using a communications link 50b, 50c. The gateway computer 46 may be implemented utilizing an

Enterprise Systems Architecture/370 available from IBM, an Enterprise Systems Architecture/390 computer, etc. Depending on the application, a midrange computer, such as an Application System/400 (also known as an AS/400) may be employed. ("Enterprise Systems Architecture/370" is a trademark of IBM; "Enterprise Systems Architecture/390", "Application System/400", and "AS/400" are registered trademarks of IBM.)

The gateway computer 46 may also be coupled 49 to a storage device (such as data repository 48). Further, the gateway 46 may be directly or indirectly coupled to one or more workstations 10.

Those skilled in the art will appreciate that the gateway computer 46 may be located a great geographic distance from the network 42, and similarly, the workstations 10 may be located a substantial distance from the networks 42 and 44. For example, the network 42 may be located in California, while the gateway 46 may be located in Texas, and one or more of the workstations 10 may be located in New York. The workstations 10 may connect to the wireless network 42 using a networking protocol such as the Transmission Control Protocol/Internet Protocol ("TCP/IP") over a number of alternative connection media, such as cellular phone, radio frequency networks, satellite networks, etc. The wireless network 42 preferably connects to the gateway 46 using a network connection 50a such as TCP or UDP (User Datagram Protocol) over IP, X.25, Frame Relay, ISDN (Integrated Services Digital Network), PSTN (Public Switched Telephone Network), etc. The workstations 10 may alternatively connect directly to the gateway 46 using dial connections 50b or 50c. Further, the wireless network 42 and network 44 may

connect to one or more other networks (not shown), in an analogous manner to that depicted in Fig. 2.

Software programming code which embodies the present invention is typically accessed by the microprocessor 12 (e.g. of workstation 10 and server 46) from long-term storage media 30 of some type, such as a CD-ROM drive or hard drive. The software programming code may be embodied on any of a variety of known media for use with a data processing system, such as a diskette, hard drive, or CD-ROM. The code may be distributed on such media, or may be distributed to users from the memory or storage of one computer system over a network of some type to other computer systems for use by users of such other systems. Alternatively, the programming code may be embodied in the memory 28, and accessed by the microprocessor 12 using the bus 14. The techniques and methods for embodying software programming code in memory, on physical media, and/or distributing software code via networks are well known and will not be further discussed herein.

A user of the present invention may connect his computer to a server using a wireline connection, or a wireless connection. Wireline connections are those that use physical media such as cables and telephone lines, whereas wireless connections use media such as satellite links, radio frequency waves, and infrared waves. Many connection techniques can be used with these various media, such as: using the computer's modem to establish a connection over a telephone line; using a LAN card such as Token Ring or Ethernet; using a cellular modem to establish a wireless connection; etc. The user's computer may be any type of computer

processor, including laptop, handheld or mobile computers; vehicle-mounted devices; desktop computers; mainframe computers; etc., having processing and communication capabilities. The remote server and the intermediary, similarly, can be one of any number of different types of computer which have processing and communication capabilities. These techniques are well known in the art, and the hardware devices and software which enable their use are readily available. Hereinafter, the user's computer will be referred to equivalently as a "workstation", "device", or "computer", and use of any of these terms or the term "server" refers to any of the types of computing devices described above.

In the preferred embodiments, the present invention is implemented as one or more modules (also known as "objects" in object-oriented programming languages) of one or more computer software programs. This computer software will be used in an environment where a user in a modern distributed computing environment is accessing a host legacy application where the application and/or data it uses is protected by a host-based security system (such as RACF).

The first preferred embodiment of the present invention enables a user to provide a single system sign-on for accessing one or more legacy host applications and/or one or more systems which provide legacy host data (such as legacy database systems) during a secure host access session which is protected by a host-based security system, where the same set of credentials must be provided more than once during the secure session. (The user may also access applications and data which are available from a modern PC-based environment such as the Internet during the scope of this session, as provided by the related invention.)

As used herein, the phrase “legacy host application” is intended to refer equivalently to legacy host systems.

5 The second preferred embodiment of the present invention enables changing user credentials that are used to access legacy host applications which provide legacy host data during a secure host access session which is protected by a host-based security system, where these changed credentials are used to authenticate a user after previously-provided credentials have been used for authentication earlier in the same session. The changed credentials may belong to the same user, where that user happens to have different credentials for different purposes. For example, the user may have different credentials for accessing different legacy applications, and may wish to change from accessing one legacy host application to accessing another. Or, the changed credentials may be used to enable a different user to interact with the same legacy host application used by the previously-authenticated user. For example, the additional credentials may belong to another person such as the current user’s supervisor, where that other person presents his credentials to certify or verify some action of the current user.

The preferred embodiments of the present invention will now be discussed with reference to Figs. 3 through 9. Fig. 3 depicts a digital certificate that may be used with both preferred embodiments. Figs. 4 through 7 pertain to the first preferred embodiment. Figs. 8 and 9 pertain to the second preferred embodiment.

20 In both preferred embodiments, a user who communicates with a legacy host application

must be authenticated. Preferably, a digital certificate such as an X.509 certificate is used. This approach is consistent with the move in the industry towards use of digital certificates and standardized security protocols (such as SSL) for authentication of users who wish to access enterprise applications and data, as distributed computing and use of the Internet continues to rise. A digital certificate may be generated for a user using techniques which are known in the art, for example by contacting a certificate authority which issues such certificates. Techniques for obtaining a digital certificate do not form part of the present invention. Once a digital certificate is generated for a user, the certificate may be used according to the preferred embodiments of the present invention to enable users working in modern distributed computing environments to access resources which are protected by host access security systems such as RACF.

A certificate conforming to the X.509 standard (hereinafter referred to as an "X.509 certificate") is used in the preferred embodiments of the present invention, although other digital certificate formats may be used alternatively without deviating from the scope of the present invention. "X.509" is an International Telecommunication Union (ITU) Recommendation and International Standard that defines a framework for providing authentication. (See ITU Recommendation X.509 (1997), titled "Information Technology - Open Systems Interconnection - The Directory: Authentication Framework", dated 8/97. This information is also published in International Standard ISO/IEC 9594-8 (1995).) A certificate format is defined in this standard. Certificates created according to this international standard, in the defined format, are referred to as "X.509 certificates".

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000

The format of an X.509 certificate is shown in Fig. 3. Hereinafter, references to “certificates” refer to the type of information shown in Fig. 3. The subject field 360 identifies the entity (e.g. the user) to which this certificate was issued. The preferred embodiments of the present invention use this subject field to identify the user, and to determine the user’s access privileges for purposes of authentication. Extracting the information from the user’s certificate and performing the authentication is automatic and transparent to the user. In this manner, the need for the user to explicitly (and redundantly) re-identify himself for purposes of communicating with a legacy host application, when the user’s same credentials must be provided more than once during a secure host access session according to the first preferred embodiment, is avoided. By providing a different certificate that signifies changed credentials, the second preferred embodiment enables securely accessing applications with a changed identity, within a single secure host access session.

The technique with which a digital certificate is used for authentication is well known in the art and will not be described in detail herein. For purposes of the preferred embodiments discussed below with reference to Figs. 4 through 9, it is assumed that the system users have already been issued one or more digital certificates and that the certificates are stored in such a manner that they are locally accessible to the client software operating on a user’s workstation. Note that while the preferred embodiments are described herein in terms of transmitting a digital certificate, a reference to the digital certificate may be transmitted as an alternative. This reference may then be used by the receiver to retrieve the actual digital certificate, for example from a certificate registry or other repository. (In this case, the certificate might not be locally

accessible to the client software.)

In a first aspect of the preferred embodiments (depicted in Figs. 4 - 6 and Figs. 8 - 9), the client device preferably uses some form of emulation or emulator product to allow communication between the distributed computing environment and the host application. For purposes of discussion herein, the client is assumed to be using an emulator product which uses the TN3270 emulation protocol. The TN3270 protocol is used to provide emulation of the "3270 data stream", as is well known to those familiar with the art. The 3270 data stream is frequently used for information transfer to and from legacy host applications, and is so named because it was originally designed for use with IBM Model 327x client workstations. However, discussion of 3270 emulation is for purposes of illustration and not of limitation. Other data stream formats may be used alternatively. Another commonly used data stream format for communicating with legacy host applications is referred to as a "5250 data stream", originally designed for communicating with IBM Model 525x workstations. The TN5250 emulation protocol is used with a 5250 data stream. Yet another commonly used data stream is an ASCII data stream, commonly referred to as a "Virtual Terminal" or "VT" data stream.

In a second aspect of the first preferred embodiment (depicted in Fig. 7), the client device is using software such as a browser to access a Web application server, and that Web application server operates as a TN3270 client to interact with a TN3270 server on behalf of the browser client.

Using emulator software for communicating with a legacy host application is well known in the art, and the software products which enable it are commercially available. One of the functions typically provided by such products is commonly referred to as "screen scraping". That is, the emulator software processes the data stream sent by a host application, searching for appearance of data which corresponds to a user interface screen intended for display on a prior art device such as a Model 327x display terminal. Upon recognizing a particular screen in the data stream, the emulator scrapes or extracts relevant data from the data stream, according to the layout and semantics of that screen. This extracted data is then typically re-formatted for use by a client software application which has a more modern type of user interface. When the client software has data to be transmitted to the host application, the emulator software receives that data and formats it for transmission to the host application, where the re-formatting enables the host application to accept the incoming data as if it was from a Model 327x screen-oriented device.

In the preferred embodiments, this approach to monitoring the datastream is used to provide a user's ID and password to a legacy application in an automated, transparent manner. Use of placeholder strings when sending messages between a client and server, as it applies to the first aspect of the preferred embodiments, was disclosed in the related application. The placeholder strings use a predetermined syntax which is agreed upon between the sending and receiving software. In the preferred embodiments of the present invention, the syntax "\$USR.ID\$" is used for the user ID placeholder, and the syntax "\$PSS.WD\$" is used for the password placeholder, although other representations may be used equivalently. Upon detecting

the presence of a placeholder in a message received at the TN3270 server, the server knows that it needs to insert the actual value of the associated placeholder before forwarding this message to the host application.

In the preferred embodiments of the present invention, a macro may be written to execute at a client workstation which is performing emulation, to automate and mask injection of the placeholder strings. As used herein, "macro" refers to a sequence of host screen interactions, and the necessary actions to navigate them, which has been captured and recorded to enable using them in an automated manner at a later time. The macro includes application-specific information about the data stream traffic to be sent to and received from a particular legacy host application. IBM's Host On Demand product, for example, may be used to create macros of this type. As the macro is being created, a person such as a systems administrator will be asked to identify the location of the user ID and password during the sign-on sequence (e.g. on which panel(s) this information will be requested, and in what relative position within the data stream the response is to be returned), along with the identifier of the application. The macro configuration software will then store the application identifier (application ID) in the macro, along with the information on where to insert the placeholder strings for the user ID and password fields.

Once a macro of this type has been created, it may be distributed to the users within an enterprise to enable them to access the corresponding legacy host application. Typically, an icon will be created and displayed on the user's desktop to enable a user to conveniently launch the

application by clicking on the icon. Or, if desired, a macro can be configured as an auto-logon macro which will play automatically at the beginning of a user's emulator session. Use of a macro or equivalent functionality by the TN3270 client is assumed for purposes of the present invention, where the macro operates to transparently detect occurrence of host screens of interest for a particular application and to respond appropriately to those host screens.

FIRST PREFERRED EMBODIMENT

Fig. 4 depicts a representative sequence of message flows that may occur when the first preferred embodiment of the present invention is used to enable a subsequent sign-on for a user within the scope of a secure host access session. To begin the process depicted in Fig. 4, the user of emulator client 401 requests establishment of a secure host access session, for example by clicking on an icon that will invoke a host access macro. In response, the client software initiates a secure session (which is an SSL, TLS, or equivalent session in all of the preferred embodiments of the present invention) using an X.509 certificate, as shown at 405. ("TLS", or Transaction Layer Security, is an SSL follow-on having similar messages and capabilities.)

Typically the user will be prompted to identify the certificate that is to be used for this session, as a particular user may have multiple certificates. As stated above, it is assumed that the digital certificate is stored such that it is accessible to the client software 401. The user may be prompted to enter a Personal Identification Number (PIN) or to use some other means (such as providing biometric information, etc.) in order to unlock access to the securely-stored certificate.

The server 402 authenticates the user of client 401 using the digital certificate received at 405 as

part of the existing SSL session establishment procedure. The server then caches (or otherwise stores) the certificate for later use. Alternatively, rather than transmitting a certificate which is locally stored at client 401, a reference to a certificate may be transmitted, as is known in the art. This reference is then used by TN3270 server 402 to retrieve an associated certificate, which is then cached or otherwise stored at the server.

The client 401 and server 402 then negotiate various Telnet services that are to be used on the secure host access session. The particular protocol messages which may be used during this negotiation in a first aspect of the first preferred embodiment are described in more detail below, with reference to Fig. 5.

Since this client 401 desires to interact with the host system 403, at 415 the server 402 opens an SNA session (or other similar host access session) with the host system 403 on behalf of the client. At 420, the host application responds by sending application data formatted as a 3270 data stream to the client 401. This data passes through the server 402 where it is transformed from a 3270 data stream to a data stream (such as a standard TN3270 data stream) suitable for the emulator client. This initial data from the host application is typically some type of "sign-on" screen asking for a user name (or other user identifier) and password. It should be noted that at this point, no interaction with the RACF program 404 has occurred, since the host application is responsible for providing the client's user name and password to the RACF system for authentication. At 425, the macro or equivalent software executing at client 401 automatically responds to a sign-on request by sending a message containing the application ID

for the initial target application in an asynchronous notification to server 402.

Upon receiving this initial sign-on sequence with the application ID parameter, TN3270 server 402 starts to scan the datastream coming from the client, searching for the placeholder strings for the user ID and password. To limit the duration of this scanning process, one approach which may be used is to scan until a complete set of placeholder strings for the password and user ID pair has been processed (i.e. detected and then replaced), in either order, or until some predetermined number of bytes (such as 10,000 bytes) has been received, whichever comes first.

Message 425 also triggers the server to locate the client's cached X.509 certificate, which was obtained at 405 during SSL session establishment. This cached certificate is then passed, together with the application ID, in flow 430 to the host-based RACF 404 software (as described in more detail below, with reference to Fig. 6). The RACF system extracts the user's identification from the subject field of the client certificate, and uses this information to locate the user's stored credentials and access privileges as they pertain to the target application. For example, the value of the subject field may be used as a key to access a stored repository of credentials, where the data in the repository has been previously created by a person such as a systems administrator. Or, the subject field may be used to access a lookup table of such information, or to access a lookup table which provides a correlation to a key used to access a credential repository (such as a subject value-to-credential key correlation). The manner in which the credentials are stored is outside the scope of the present invention.

15 The RACF secured sign-on procedure is then invoked at the RACF implementation 404, using techniques which are known in the art. "RACF secured sign-on" is a procedure for enabling clients to sign on to a host and communicate securely without sending RACF passwords across a network. Instead, a dynamically-generated short-lived credential referred to as a "passticket" is generated by the RACF software as a password substitute. Passtickets, and the procedure with which they are generated, are known in the art. As an alternative (for example, in other host access systems other than RACF) to generating a passticket, an actual password may be retrieved by the host access security system, where this password may then be used directly instead of using a passticket as a password substitute. References herein to use of a "passticket" are to be interpreted as referring equivalently to use of a password supplied by the host access security system.

20 The passticket represents the access privileges for the user identified by the subject field of the digital certificate transmitted at 430. The RACF software 404 sends 435 this passticket to the server 402, along with the user ID (or user name) to which it corresponds (i.e. the user ID associated with the credentials and application ID for which the passticket was generated).

At some point, client 401 transmits message 440 which includes placeholder strings for the user's ID and password values. When a macro is used at the client workstation, this macro is preferably written to supply a message which provides the placeholder strings in response to a request from the host application for the user's ID and password, as stated previously. The server intercepts message 440, inserts the returned user ID and passticket into the 3270 data

stream in place of the placeholders (completing the log on request message 425 from the client software 401), and sends the resulting data stream to the host 403 at 445. Using this passticket and user identification data, the legacy host application can determine the user's access privileges in the manner with which it has already been programmed (e.g. by transmitting the user ID and passticket to RACF for verification, after which the RACF software will return a positive response to the host application). The host application 403 and the client 401 then interact as shown at 450 to perform functions of the legacy application.

At some point during this interaction, it may become necessary for the user to provide his security credentials again. For example, the host application may be written to display a menu which prompts the user to re-enter his user ID and/or password. Or, the user may indicate that he or she wishes to change to a different host application, where the user's ID and password must be supplied as that different application begins execution. According to the first preferred embodiment of the present invention, the credentials are provided again in a manner that is transparent to the user -- that is, the user is not required to re-enter his user ID and password. Instead, the macro or equivalent software executing at the client 401 transparently provides information needed for the subsequent sign-on. In the scenario depicted in Fig. 4, the client software asynchronously initiates access to a different application (for example, by playing the stored commands of a different macro), sending message 455 to the server 402 where this message indicates the application identifier. (This application ID may be the same as, or different from, the application ID transmitted in message 425.)

Upon receiving notice of the new sign-on sequence, the server 402 restarts the process of scanning the data stream coming from the client 401, looking for user ID and password placeholder strings, in the same manner described above. The server 402 also sends a message 460 to the RACF software 404 which includes the application ID from message 455, along with the cached certificate which was received at 405 (or, alternatively, a reference to this cached certificate). This message 460 requests a passticket from the RACF system, as has been described with reference to message 430. The RACF software performs an authentication of the user's credentials, as described with reference to message 430, and returns a response 465 which includes a passticket and an identification of the user for whom this passticket was generated. At some point, client 401 transmits message 470 which has user ID and password placeholders, signifying the subsequent sign-on. The server 403 inserts the user identification and passticket from message 465 into this message 470, and passes it to the host application at 475. The host application uses this information as described above for message 445. In this manner, the first embodiment of the present invention enables a subsequent authorization process to be performed for the subsequently-provided sign-on information without requiring the user to re-enter his user ID or password. The interaction between client 401 and host application 403 proceeds in the normal manner, as shown at 480.

Fig. 5 illustrates a textual version of protocol message flows which may be used to support this aspect of the first preferred embodiment. In this first aspect, where the client is using TN3270 emulation, the TN3270 client and server are negotiating their capabilities using the Telnet protocol where one party can request whether the other party supports a particular

function by issuing the Telnet DO command immediately followed by the function requested. The other party signals support for the requested function by responding with the Telnet WILL command immediately followed by the function supported. In the preferred embodiment of this aspect during the Telnet negotiations between the TN3270 client and server, the protocol defined in Request For Comments (RFC) 1572, titled "Telnet Environment Option" and dated January 1994, is used. This RFC is incorporated herein by reference. The protocol defined in RFC 1572 enables passing environment information between a Telnet client and Telnet server. This aspect of the first preferred embodiment uses the NEW-ENVIRON command to negotiate support of the passticket function and of the capability for transmitting an application ID from a client (such as that shown on messages 425 and 455) during an ongoing session.

The protocol message flows indicated at 510 in Fig. 5 correspond to message flow 410 of Fig. 4. Initiation of the negotiation process occurs as in the prior art. During this negotiation process, the server sends the "IAC DO NEW-ENVIRON" command, which tells the client that the server is willing to receive environment variables. The client agrees to send environment variables by responding with the "IAC WILL NEW-ENVIRON" command. The server then asks the client to transmit particular ones of its environment variables by sending the "IAC SB NEW-ENVIRON SEND" command. The parameters included on that command for this aspect of the first preferred embodiment are for determining the client's support of the passticket function and application ID, as stated above. These parameters are transmitted using USERVAR syntax, which is provided by RFC 1572 to allow use of application-specific variable names and values. The syntax shown in Fig. 5 for the parameters is USERVAR PASSTICKET and

USERVAR APPLID, although other names may be given to the environment variables without deviating from the scope of the present invention.

The client's response to this protocol message is shown in Fig. 5 as the "IAC SB NEW-ENVIRON IS" command, having parameters "USERVAR PASSTICKET VALUE YES" and "USERVAR APPLID VALUE". The PASSTICKET parameter value of "YES" indicates that the client supports passtickets, and the APPLID parameter has a null value which indicates that no application ID is being sent at this (session-establishment) time.

At this point in a normal sign-on sequence, the Telnet protocol negotiations are complete and the sign-on sequence can commence. The server then sends "USS MSG10" to the client, which signifies that an initial sign-on screen is to be displayed. The host access macro (or equivalent software) invoked by the user begins to play, and recognizes screens being sent from the host application. Once the application ID is available, the client responds to the sign-on request by sending the command "IAC SB NEW-ENVIRON INFO" with the USERVAR APPLID parameter as shown at 525, where the parameter value specifies the application which is to be accessed. As shown in the example of Fig. 5, the first application the user requests access to is "RALVMS". (As stated previously, the macro is created to insert the correct application ID in this protocol message.) This protocol message corresponds to message 425 in Fig. 4. The server then uses this application ID, along with the cached certificate, to obtain a passticket for the user (as described with reference to messages 430 and 435 of Fig. 4). (At some point following this message 525, the placeholder strings which were described with reference to

message 440 of Fig. 4 appear, although this has not been depicted in Fig. 5.)

Suppose that the user now signs off of application RALVMS, and starts another macro to sign on to an application having identifier "TSO1". The protocol message flow which enables this application change in this preferred embodiment is shown at 555 in Fig. 5, where the client sends the command "IAC SB NEW-ENVIRON INFO" with the USERVAR APPLID parameter which has its value set to the new application ID (TSO1, in the example). This protocol message corresponds to message flow 455 in Fig. 4. Note that the protocol message specifying the new application ID may be generated asynchronously, providing users of the present invention a very flexible and powerful solution for accessing legacy host applications in a distributed computing environment.

Fig. 6 depicts the components which may be used in the first preferred embodiment of the present invention, and shows how the messages which have been described flow between these components. At 601, the user clicks on an icon which starts a host access session macro configured to use SSL client authentication. Assuming that the macro operates in auto-logout mode, it immediately unlocks 602a a certificate file using, e.g., a PIN supplied by the client. The certificate is made available 602b for use in the SSL handshake. During the SSL handshake, the user's certificate is passed 603 to the TN server and validated. This prior art validation process uses public key authentication, as is known in the art. If the certificate is determined to have been revoked, the handshaking protocol will not complete successfully. The passticket capability is then negotiated 604, as discussed with reference to Fig. 5.

Sign-on screens are sent 605 to the client as in the prior art. However, instead of prompting the user to enter a user ID and password, the macro plays and inserts the placeholder strings. When the placeholder strings reach the TN3270 server, they are intercepted. Assuming the user's certificate passed the checks during the handshaking protocol, the server sends 606 the user's certificate (in binary format) and the application ID on a secure, trusted connection to a daemon program running on the host system. In the preferred embodiment, this daemon is the IBM Digital Certificate Access Server (DCAS) which runs on the System/390®. ("System/390" is a registered trademark of IBM.) The DCAS daemon then calls 607 the RACF software. RACF uses the certificate to determine the user's ID, and generates a passticket based on a combination of the user ID and the target application ID. The user ID and passticket are then returned 608a, 608b to the TN3270 server. The server then inserts the passticket and user ID into the intercepted message, in place of the placeholder strings, and forwards them 609 to the target legacy application at the host. The legacy application software presents 610 the user ID and passticket to RACF, which approves them, and the sign-on process completes.

Note that the configuration shown in Fig. 6 assumes use of a three-tier system where the TN3270 server and host application reside on different machines. Thus, the connection between them needs to be secure and trusted. If a two-tier system is used where the TN3270 function operates on the same host system as the host application, then the passticket daemon is not used; instead, the RACF calls are issued in-line by the TN3270 component.

Note also that more than one host system may be involved when using the preferred

embodiments of the present invention. For example, the RACF software may reside on a different host than the target host application.

Fig. 7 depicts flows which may be used for the first preferred embodiment when operating in a Web Application environment. In this second aspect of the first preferred embodiment, the Web application server 702 is functioning as a proxy for client 701, intercepting and responding to messages on behalf of the client 701, which uses a browser or other similar software. As indicated in Fig. 7, the client's browser 701 initiates 705 an SSL session and provides a digital certificate (preferably an X.509 certificate, as previously described with reference to the certificate 300 of Fig. 3) to the Web application server 702. The Web application server 702 authenticates the client using this digital certificate as in the prior art and caches (or otherwise stores) the certificate for later use. The client 701 then begins interaction with the Web application server 702 as shown at 710. Since the client desires to interact with the host system 703, the Web application server 702 initiates a 3270 session (using the TN3270 emulation protocol) at 715 with the host application located on host server 703. The 3270 data stream application data flows at 720 from the host application 703 to the Web application server 702.

The Web application server at 725 signifies to the host server that the client wishes to log on to an application. Typically, the application software executing on the Web application server 702 will prompt the user with special input prompts (for example, by presenting a Web page form for the user to fill in) to supply his identification and password information. According to

the related invention, however, the Web application server application software automatically and transparently uses the cached client's certificate 300 (which was obtained during flow 705) to supply this information. The Web application server locates the previously-stored client certificate, and includes it along with the target application ID in message 725 which is sent to the RACF implementation 704. As described above, RACF uses the digital certificate to extract a user ID or name (from subject field 360) and to generate a passticket representing the credentials of that user after accessing stored credential information. At 730, RACF returns the user ID and passticket through the host server 703 to the Web application server 702. As disclosed in the related invention, the Web application server 702 then inserts the user ID and passticket information into the 3270 data stream expected by the host application and sends it, at 735, to the host server 703. The legacy host application uses this information to allow the user to access protected applications and/or data, without requiring changes to the host application itself. Traffic flows between the host server 703 and the Web application server 702 at 740 as in the prior art. Interaction between the legacy host application and client 701 (shown at 745) occurs also as in the prior art.

At some time later, the Web application at browser client 701 indicates a new host application sign-on sequence (which, as described for the first aspect, may be to the same application currently in use or to a different application). The Web application server 702 may need to solicit the application ID (e.g. using a HyperText Transfer Protocol, or "HTTP", message) from the client 701, if this information is not already available to the server. In response to receiving message 750, the Web application server retrieves the previously-cached

certificate (received in flow 705), and sends 755 this certificate (or a reference thereto) along with the application ID to RACF 704 in the same manner which has been described for message 460 of Fig. 4. (Note that the TN3270 server is not required to scan the 3270 data stream for the user ID and password in this aspect, as the correct values are automatically provided by the TN client.) The RACF response, including the generated passticket, is received at 760. The Web application server then uses this information to send 765 to the host application at host system 703. The host application verifies the user's credentials using this passticket and user ID, and traffic between the host application and Web application server proceeds as in the prior art, as shown at 770. The client application 701 then proceeds to interact 775 with the now-current host application.

SECOND PREFERRED EMBODIMENT

Fig. 8 depicts a sequence of message flows that may occur when the second preferred embodiment of the present invention is used to enable changed user credentials to be provided during a subsequent sign-on within the scope of a secure host access session. The message flows from 805 through 850 are identical to those in Fig. 4 which are numbered 405 through 450, and provide for establishing a secure host access session in which a user interacts with a first host application. Element 910 of Fig. 9 depicts the protocol message flows which correspond to message 810 of Fig. 8 and which may be used during negotiation of Telnet services between client 801 and server 802 in this second preferred embodiment. These protocol messages are described in more detail below.

In Fig. 8, receipt of message 855 indicates that the client wishes to use different credentials. As previously discussed, this message may be sent to enable a previously-authenticated user to use different credentials, or to enable a different user to authenticate himself to an application within the same secure session. As indicated in message 855, a new certificate (or, alternatively, a reference thereto) is transmitted from client 801, along with an identifier of the application, in this asynchronous notification. In addition, this message 855 includes additional information that is used to prove that the sender is the legitimate owner of the certificate (i.e. is authorized to use the certificate). The manner in which this message is formatted and in which the authorization proof is provided in this second preferred embodiment is discussed in more detail below, with reference to element 955 of Fig. 9. This new certificate is cached or otherwise stored at server 802, and is forwarded to RACF 804 along with the user ID and application identifier from message 855. The processing of message flows 860 through 880 is analogous to those numbered 460 through 480 in Fig. 4, except that message 860 passes the certificate which was received on message flow 855 instead of the certificate received during the SSL session establishment flows (and the passticket returned at 865 then represents the access privileges of this new certificate).

Fig. 9 illustrates a textual version of protocol message flows which may be used to support this second preferred embodiment. As in the first aspect of the first preferred embodiment, the protocol defined in RFC 1572 is preferably used for this second preferred embodiment where the client is using TN3270 emulation.

As described with reference to Fig. 5, the Telnet negotiations include the server and client exchanging DO and WILL commands, after which the server requests the client to indicate its support for a number of environment variables. In this second preferred embodiment, the PASSTICKET parameter and APPLID parameter are used as described above for the first preferred embodiment. Additional parameters, which in the example shown in Fig. 9 have the syntax "CERTIFICATE", "RSEED...", and "AUTHINFO", are used on the NEW-ENVIRON command, as shown in elements 910 and 955. The server first transmits these parameters on a "NEW-ENVIRON SEND" command, and the client responds with a "NEW-ENVIRON IS" command. Preferably, the client sends a YES value to indicate its support of the PASSTICKET function, and null values for the APPLID parameter and for each of the additional parameters (to indicate that the client supports that environment variable, but does not yet have a value defined).

The new additional parameters are used, according to the second embodiment of the present invention, as proof to authenticate the identity of the certificate sender. The first of the additional parameters, "CERTIFICATE", is used to convey the contents of a digital certificate. The "RSEED..." parameter is used to enable the server to pass a random value to the client. The random number value is concatenated to the environment variable name, enabling the server to pass variable data to the client even though an explicit capability for transmitting values from the sender of the DO command is not provided in RFC 1572. For example, if the random number is 1490285673237, then the environment variable is passed from the server in the NEW-ENVIRON SEND command as "USERVAR RSEED1490285673237", and returned from the client in the

NEW-ENVIRON IS command as "USERVAR RSEED1490285673237 VALUE". (Note: this example is not intended to be representative of the optimal length of the random seed value.)

Both the client and server record the value to be used as the random seed value for later use. The client and server will use this random value, along with a sequence number, to prevent replay attacks. The "AUTHINFO" parameter is used to transmit authentication information from the client to the server, as will now be described.

The first NEW-ENVIRON INFO command 925 sent by the client after the Telnet negotiations end is used to transmit the application ID for which the user's initially-provided credentials are to be used. This first INFO command is analogous to that described above with reference to Fig. 5, and again shows the user requesting the application "RALVMS". (At some point following this message 925, the placeholder strings which were described with reference to message 840 of Fig. 8 appear, although this has not been depicted in Fig. 9.)

When the user needs to supply changed credentials during the secure session, either to the same application or to a different application (such as "TSO1", as used in this example), this second preferred embodiment sends the protocol message format shown at element 955 (which corresponds to message flow 855 of Fig. 8). The new certificate (or a reference thereto) is now sent to the server as the value of the USERVAR CERTIFICATE parameter. This information is insufficient on its own for authenticating the changed credentials, because the server cannot trust that the credentials are being sent by the actual certificate holder. Thus, this second preferred embodiment uses the AUTHINFO parameter to provide additional authentication information

which will enable the server to establish that the certificate sender is the legitimate certificate holder. The value to be sent as the USERVAR AUTHINFO value is computed by first concatenating the random seed value, followed by a sequence number, followed by the application ID value. The concatenated string is then digitally signed using the private key associated with the certificate being transmitted in the USERVAR CERTIFICATE parameter. Preferably, the sequence number which is used begins at a predefined value such as 0 and is incremented each time the client undergoes an identity change during the scope of this secure session. The application ID may be omitted from the concatenated value if desired, without deviating from the scope of the present invention. However, it is used in this second preferred embodiment to bind the digitally signed authentication information to the current application sign-on, which then makes it more difficult for a security exposure to extend beyond the scope of a single host application. As will be obvious to one of skill in the art, the server determines whether the legitimate certificate holder sent the subsequent sign-on by using the public key 374 from the transmitted certificate to decrypt the AUTHINFO parameter value. Upon decrypting the value, the server compares the concatenated information to the server's copy of the random seed and sequence number, and to the application ID sent on the APPLID parameter.

In this manner, the server can authenticate the changed credentials during the on-going session in a manner that is transparent to the legacy host application. Note that while this second preferred embodiment has been described herein as being applicable for the scenario where user credentials are to be changed in a subsequent sign-on, this technique may also be used advantageously in the first aspect of the first preferred embodiment (i.e. where the credentials are

not changing), where the originally-provided certificate is transmitted from the client to the server using the additional USERVAR parameters described with reference to Fig. 9. In effect, transmitting the certificate in this manner separates authentication of the user to use the legacy host application from authentication of the client (i.e. the client's user) to participate in a Telnet session with the Telnet server. Furthermore, while different message formats are shown at 925 and 955 of Fig. 9, the message format used at 955 may alternatively be used in all cases when using this second preferred embodiment (and/or when using the first aspect of the first preferred embodiment), if desired.

The components which were illustrated in Fig. 6 may also be used in this second preferred embodiment of the present invention, in the manner which has been described.

While the preferred embodiment of the present invention has been described, additional variations and modifications in that embodiment may occur to those skilled in the art once they learn of the basic inventive concepts. In particular, alternative data streams (such as a 5250 data stream or a VT data stream) may be used which provide the communications between the user's modern PC-based computer system and the legacy host applications and data. Further, security software other than the IBM RACF software may be used for protecting host-based assets, and techniques other than the RFC 1572 protocol may be used to convey information between the client and server provided that functionality equivalent to that described herein is supported.

Therefore, it is intended that the appended claims shall be construed to include both the preferred embodiment and all such variations and modifications as fall within the spirit and scope of the

invention.

CONFIDENTIAL

What is claimed is:

1. A computer program product for enabling an identity change during a certificate-based host access session, said computer program product embodied on a computer-readable medium and comprising:

computer-readable program code means for processing a first sign-on during a secure session using a digital certificate, further comprising:

computer-readable program code means for establishing said secure session from a client machine to a server machine using said digital certificate, wherein said digital certificate represents an identity of said client machine or a user thereof;

computer-readable program code means for storing said digital certificate or a reference thereto at said server machine;

computer-readable program code means for establishing a session from said server machine to a host system using a legacy host communication protocol;

computer-readable program code means for passing said stored digital certificate or said reference from said server machine to a host access security system;

computer-readable program code means, operable in said host access security system, for authenticating said identity using said passed digital certificate or a retrieved certificate which is retrieved using said reference;

computer-readable program code means for using said passed or retrieved digital certificate to locate access credentials for said user;

computer-readable program code means for accessing a stored password or generating a password substitute representing said located credentials; and

22 computer-readable program code means for using said stored password or said
23 generated password substitute to transparently complete said first sign-on to a secure legacy host
24 application executing at said host system; and

25 computer-readable program code means for processing a second sign-on during said
26 secure session using a second digital certificate for a second identity, wherein said second sign-
27 on requests access to said secure legacy host application or a different legacy host application by
28 said user or by a different user, further comprising:

29 computer-readable program code means for receiving a second sign-on request
30 using said second digital certificate for said second identity;

31 computer-readable program code means for passing said second digital certificate
32 or a second certificate reference from said server machine to said host access security system;

33 computer-readable program code means, operable in said host access security
34 system, for authenticating said second identity using said passed second digital certificate or a
35 second retrieved certificate which is retrieved using said second certificate reference;

36 computer-readable program code means, operable in said host access security
37 system, for using said passed second digital certificate or said second retrieved certificate to
38 locate second access credentials;

39 computer-readable program code means for accessing a second stored password
40 or generating a second password substitute representing said second credentials; and

41 computer-readable program code means for using said second stored password or
42 said second password substitute to transparently complete said second sign-on to said secure
43 legacy host application executing at said host system or said different legacy host application.

1 2. The computer program product as claimed in Claim 1, wherein said digital certificate is
2 an X.509 certificate and said digital certificate reference and second certificate reference are
3 references to an X.509 certificate.

1 3. The computer program product as claimed in Claim 1, wherein said communication
2 protocol is a 3270 emulation protocol.

1 4. The computer program product as claimed in Claim 1, wherein said communication
2 protocol is a 5250 emulation protocol.

1 5. The computer program product as claimed in Claim 1, wherein said communication
2 protocol is a Virtual Terminal protocol.

1 6. The computer program product as claimed in Claim 3, wherein said host access security
2 system is a Resource Access Control Facility (RACF) system.

1 7. The computer program product as claimed in Claim 1, wherein said computer-readable
2 program code means for processing said second sign-on further comprises computer-readable
3 program code means for storing said second digital certificate.

1 8. The computer program product as claimed in Claim 1, wherein:

2 said computer-readable program code means for processing said first sign-on further
3 comprises:

4 computer-readable program code means for requesting by said legacy host
5 application, responsive to said computer-readable program code means for establishing said
6 session, first sign-on information for said user;

7 computer-readable program code means for responding to said request for first
8 sign-on information by sending a first sign-on message with placeholders from said client
9 machine to said server machine, said placeholders representing a user identification and a
10 password of said user; and

11 computer-readable program code means for substituting a user identifier
12 associated with said located access credentials and said stored password or said generated
13 password substitute for said placeholders in said first sign-on message; and

14 said computer-readable program code means for processing said second sign-on further
15 comprises:

16 computer-readable program code means for requesting, by said legacy host
17 application, second sign-on information for said second identity;

18 computer-readable program code means for responding to said request for second
19 sign-on information by sending a second sign-on message with placeholders from said client
20 machine to said server machine, said placeholders representing a different user identification and
21 a different password of said second identity; and

22 computer-readable program code means for substituting said second user
23 identifier associated with said second access credentials and said second stored password or said

24 second password substitute for said placeholders in said second sign-on message.

1 9. A system for enabling an identity change during a certificate-based host access session,
2 comprising:

3 means for processing a first sign-on during a secure session using a digital certificate,
4 further comprising:

5 means for establishing said secure session from a client machine to a server
6 machine using said digital certificate, wherein said digital certificate represents an identity of
7 said client machine or a user thereof;

8 means for storing said digital certificate or a reference thereto at said server
9 machine;

10 means for establishing a session from said server machine to a host system using a
11 legacy host communication protocol;

12 means for passing said stored digital certificate or said reference from said server
13 machine to a host access security system;

14 means, operable in said host access security system, for authenticating said
15 identity using said passed digital certificate or a retrieved certificate which is retrieved using said
16 reference;

17 means for using said passed or retrieved digital certificate to locate access
18 credentials for said user;

19 means for accessing a stored password or generating a password substitute
20 representing said located credentials; and

means for using said stored password or said generated password substitute to transparently complete said first sign-on to a secure legacy host application executing at said host system; and

means for processing a second sign-on during said secure session using a second digital certificate for a second identity, wherein said second sign-on requests access to said secure legacy host application or a different legacy host application by said user or by a different user, further comprising:

means for receiving a second sign-on request using said second digital certificate for said second identity;

means for passing said second digital certificate or a second certificate reference from said server machine to said host access security system;

means, operable in said host access security system, for authenticating said second identity using said passed second digital certificate or a second retrieved certificate which is retrieved using said second certificate reference;

means, operable in said host access security system, for using said passed second digital certificate or said second retrieved certificate to locate second access credentials;

means for accessing a second stored password or generating a second password substitute representing said second credentials; and

means for using said second stored password or said second password substitute to transparently complete said second sign-on to said secure legacy host application executing at said host system or said different legacy host application.

1 10. The system as claimed in Claim 9, wherein said digital certificate is an X.509 certificate
2 and said digital certificate reference and second certificate reference are references to an X.509
3 certificate.

1 11. The system as claimed in Claim 9, wherein said communication protocol is a 3270
2 emulation protocol.

1 12. The system as claimed in Claim 11, wherein said host access security system is a
2 Resource Access Control Facility (RACF) system.

13. The system as claimed in Claim 9, wherein said means for processing said second sign-on
further comprises means for storing said second digital certificate.

14. The system as claimed in Claim 9, wherein:

said means for processing said first sign-on further comprises:

means for requesting by said legacy host application, responsive to said means for
establishing said session, first sign-on information for said user;

means for responding to said request for first sign-on information by sending a
first sign-on message with placeholders from said client machine to said server machine, said
placeholders representing a user identification and a password of said user; and

means for substituting a user identifier associated with said located access
credentials and said stored password or said generated password substitute for said placeholders

in said first sign-on message; and

said means for processing said second sign-on further comprises:

means for requesting, by said legacy host application, second sign-on information for said second identity;

means for responding to said request for second sign-on information by sending a second sign-on message with placeholders from said client machine to said server machine, said placeholders representing a different user identification and a different password of said second identity; and

means for substituting said second user identifier associated with said second access credentials and said second stored password or said second password substitute for said placeholders in said second sign-on message.

15. A method for enabling an identity change during a certificate-based host access session, comprising the steps of:

processing a first sign-on during a secure session using a digital certificate, further comprising the steps of:

establishing said secure session from a client machine to a server machine using said digital certificate, wherein said digital certificate represents an identity of said client machine or a user thereof;

storing said digital certificate or a reference thereto at said server machine;

establishing a session from said server machine to a host system using a legacy host communication protocol;

11 passing said stored digital certificate or said reference from said server machine to
12 a host access security system;

13 authenticating, by said host access security system, said identity using said passed
14 digital certificate or a retrieved certificate which is retrieved using said reference;

15 using said passed or retrieved digital certificate to locate access credentials for
16 said user;

17 accessing a stored password or generating a password substitute representing said
18 located credentials; and

19 using said stored password or said generated password substitute to transparently
20 complete said first sign-on to a secure legacy host application executing at said host system; and

21 processing a second sign-on during said secure session using a second digital certificate
22 for a second identity, wherein said second sign-on requests access to said secure legacy host
23 application or a different legacy host application by said user or by a different user, further
24 comprising the steps of:

25 receiving a second sign-on request using said second digital certificate for said
26 second identity;

27 passing said second digital certificate or a second certificate reference from said
28 server machine to said host access security system;

29 authenticating, by said host access security system, said second identity using said
30 passed second digital certificate or a second retrieved certificate which is retrieved using said
31 second certificate reference;

32 using, by said host access security system, said passed second digital certificate or

33 said second retrieved certificate to locate second access credentials;
34 accessing a second stored password or generating a second password substitute
35 representing said second credentials; and
36 using said second stored password or said second password substitute to
37 transparently complete said second sign-on to said secure legacy host application executing at
38 said host system or said different legacy host application.

1 16. The method as claimed in Claim 15, wherein said digital certificate is an X.509 certificate
2 and said digital certificate reference and second certificate reference are references to an X.509
3 certificate.

4 17. The method as claimed in Claim 15, wherein said communication protocol is a 3270
5 emulation protocol.

6 18. The method as claimed in Claim 17, wherein said host access security system is a
7 Resource Access Control Facility (RACF) system.

8 19. The method as claimed in Claim 15, wherein said step of processing said second sign-on
9 further comprises the step of storing said second digital certificate.

10 20. The method as claimed in Claim 15, wherein:

11 said step of processing said first sign-on further comprises the steps of:

3 requesting by said legacy host application, responsive to said step of establishing
4 said session, first sign-on information for said user;

5 responding to said request for first sign-on information by sending a first sign-on
6 message with placeholders from said client machine to said server machine, said placeholders
7 representing a user identification and a password of said user; and

8 substituting a user identifier associated with said located access credentials and
9 said stored password or said generated password substitute for said placeholders in said first
10 sign-on message; and

11 said step of processing said second sign-on further comprises the steps of:

12 requesting, by said legacy host application, second sign-on information for said
13 second identity;

14 responding to said request for second sign-on information by sending a second
15 sign-on message with placeholders from said client machine to said server machine, said
16 placeholders representing a different user identification and a different password of said second
17 identity; and

18 substituting said second user identifier associated with said second access
19 credentials and said second stored password or said second password substitute for said
20 placeholders in said second sign-on message.

ABSTRACT

The present invention provides a method, system, and computer program product which enables changing user credentials that are used to access legacy host applications and/or systems which provide legacy host data during a secure host access session which is authenticated using a digital certificate and is protected by a host-based security system, such as RACF (Resource Access Control Facility, a product offered by the IBM Corporation), where these changed credentials are used to authenticate a user after previously-provided credentials have been used for authentication earlier in the same session. The changed credentials may belong to the same user, where that user happens to have a different user ID and/or password for different legacy host applications and wishes to change from accessing one legacy host application to accessing another. Or, the changed credentials may be used to enable a different user to interact with the same legacy host application used by the previously-authenticated user. The disclosed technique may also be used advantageously to authenticate a user for accessing an application, when the user's credentials are not changing.

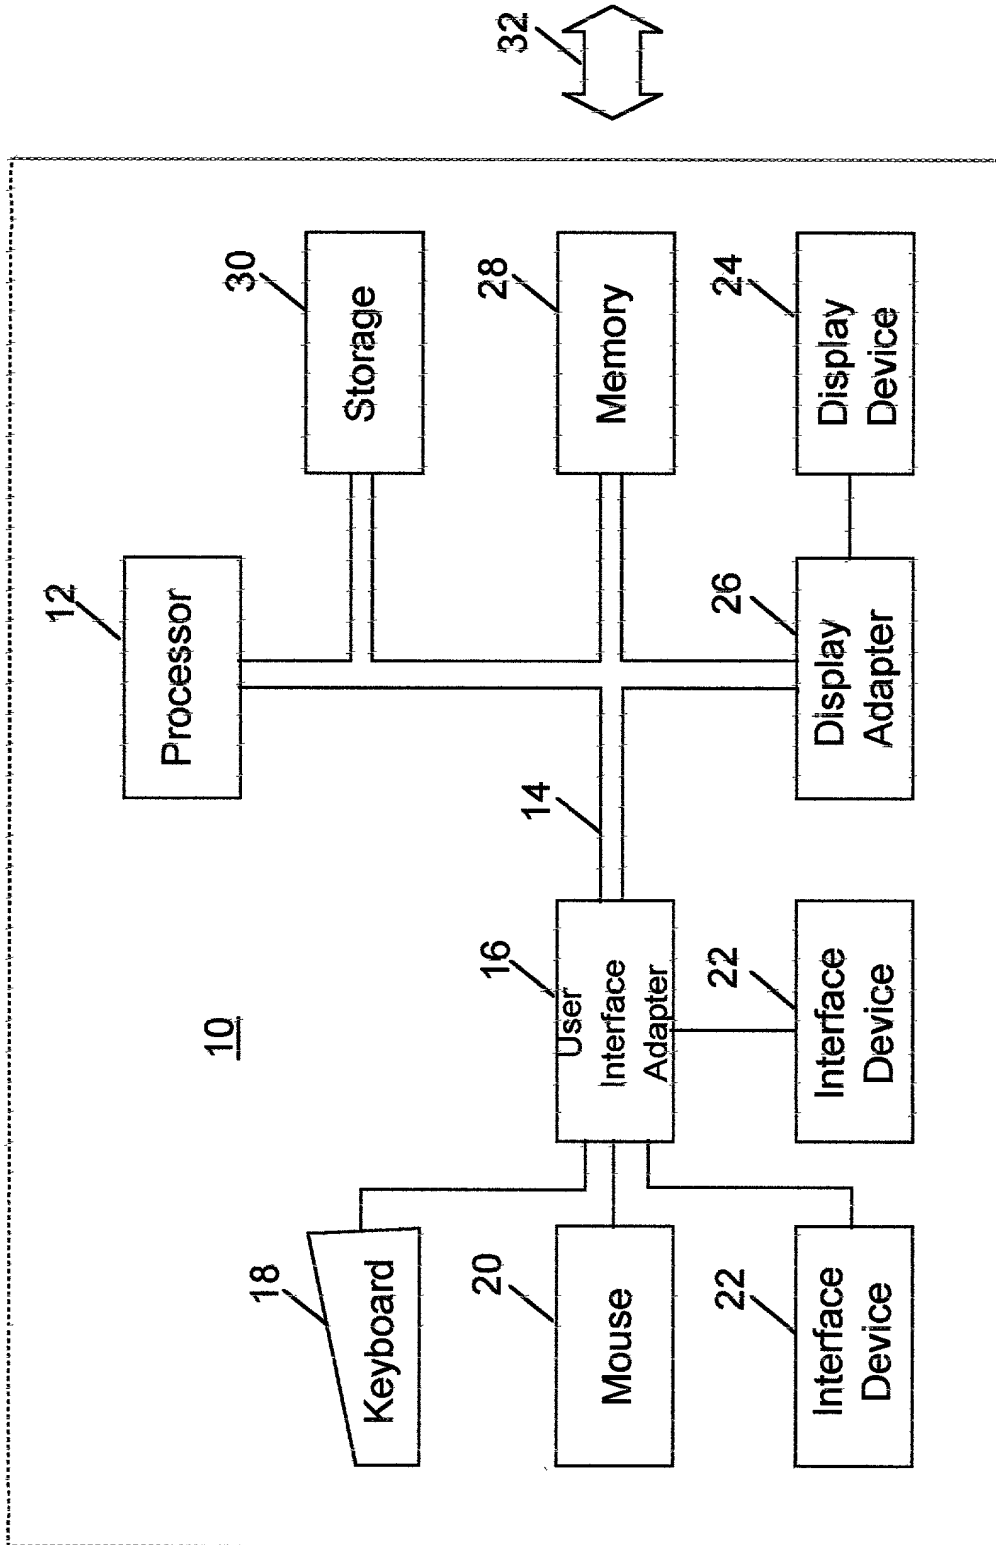


FIG. 1
(PRIOR ART)



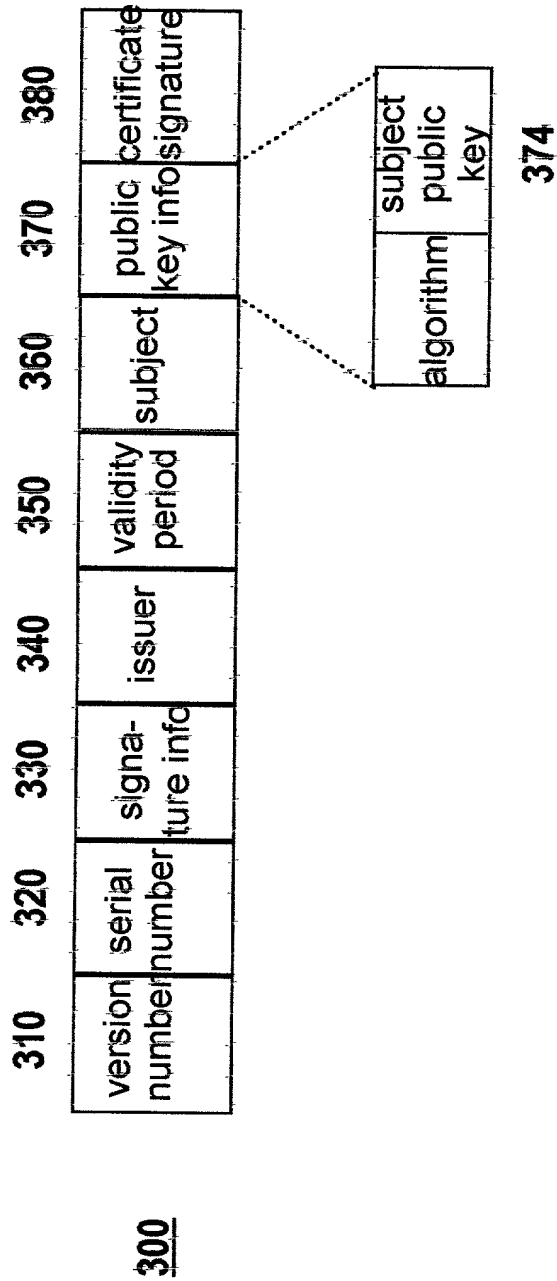


FIG. 3

FIG. 4


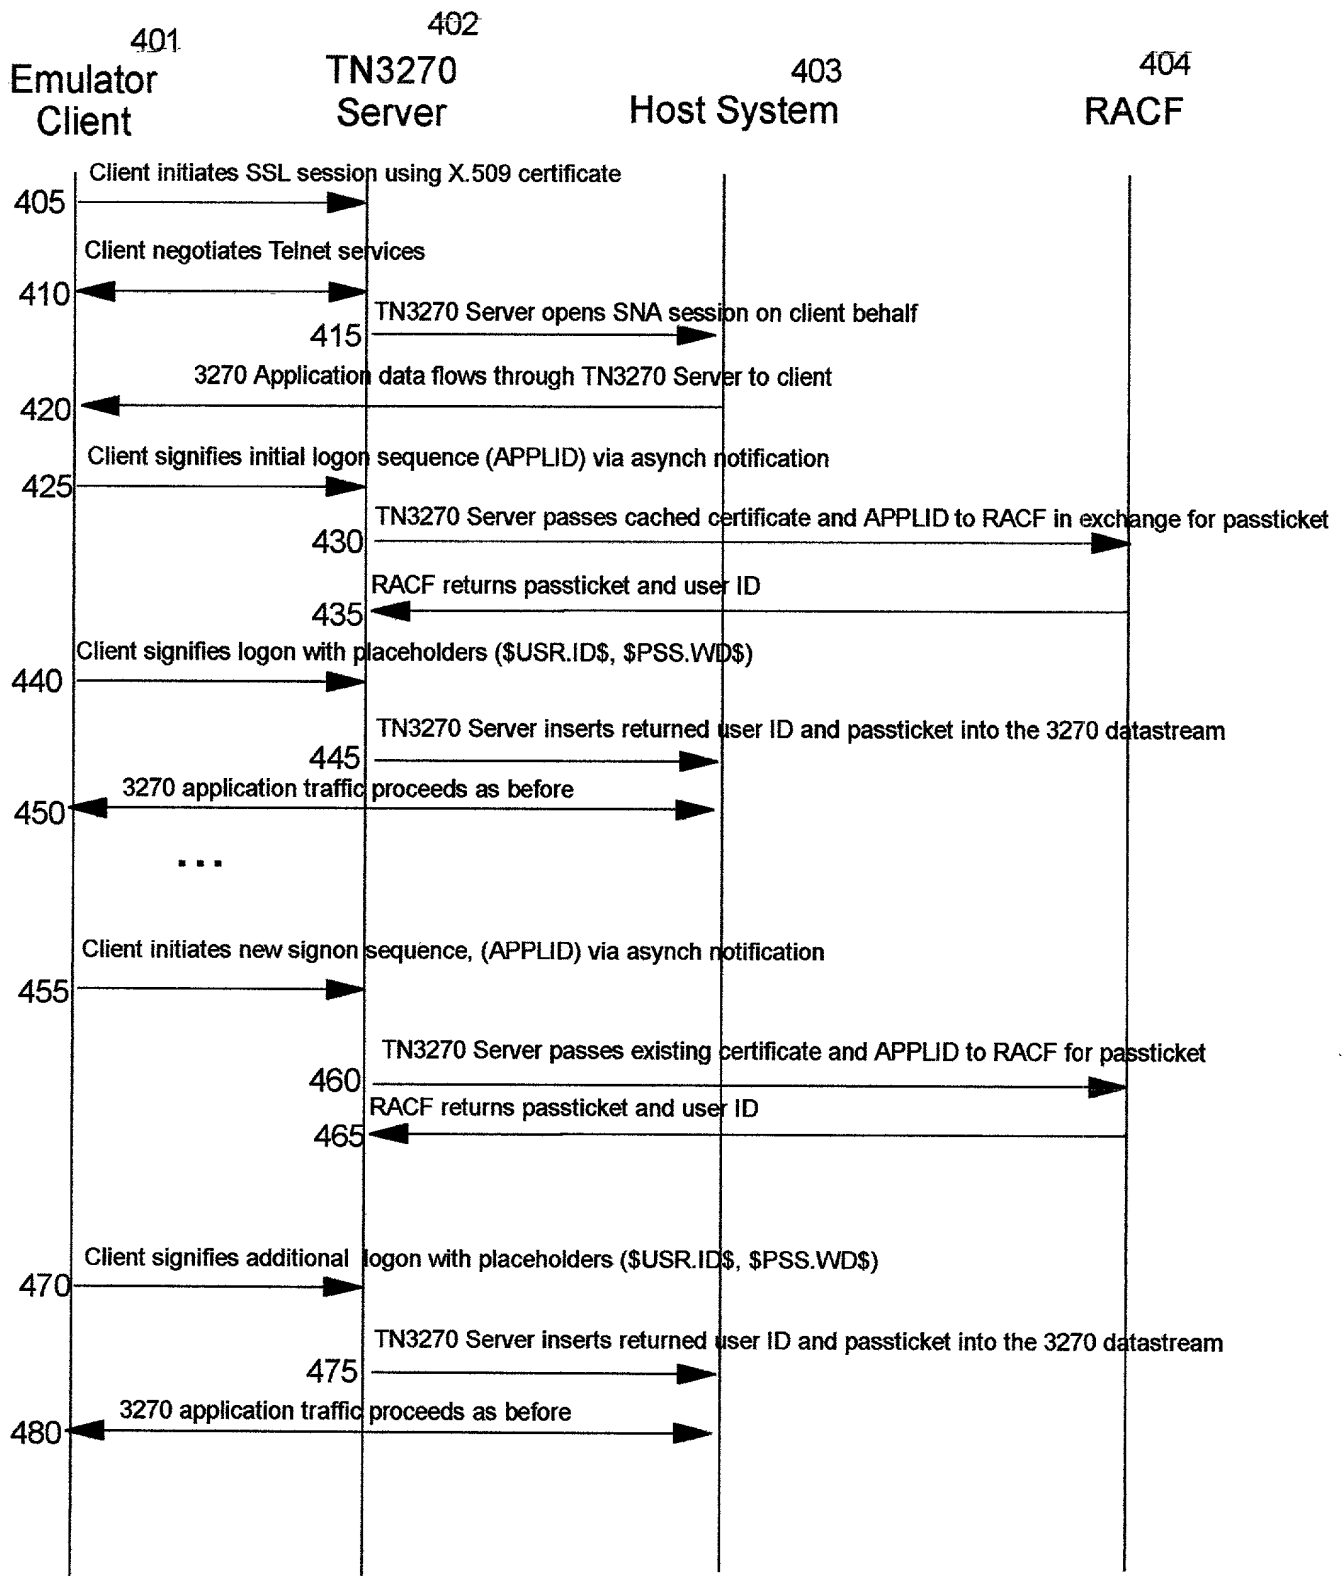


FIG. 5

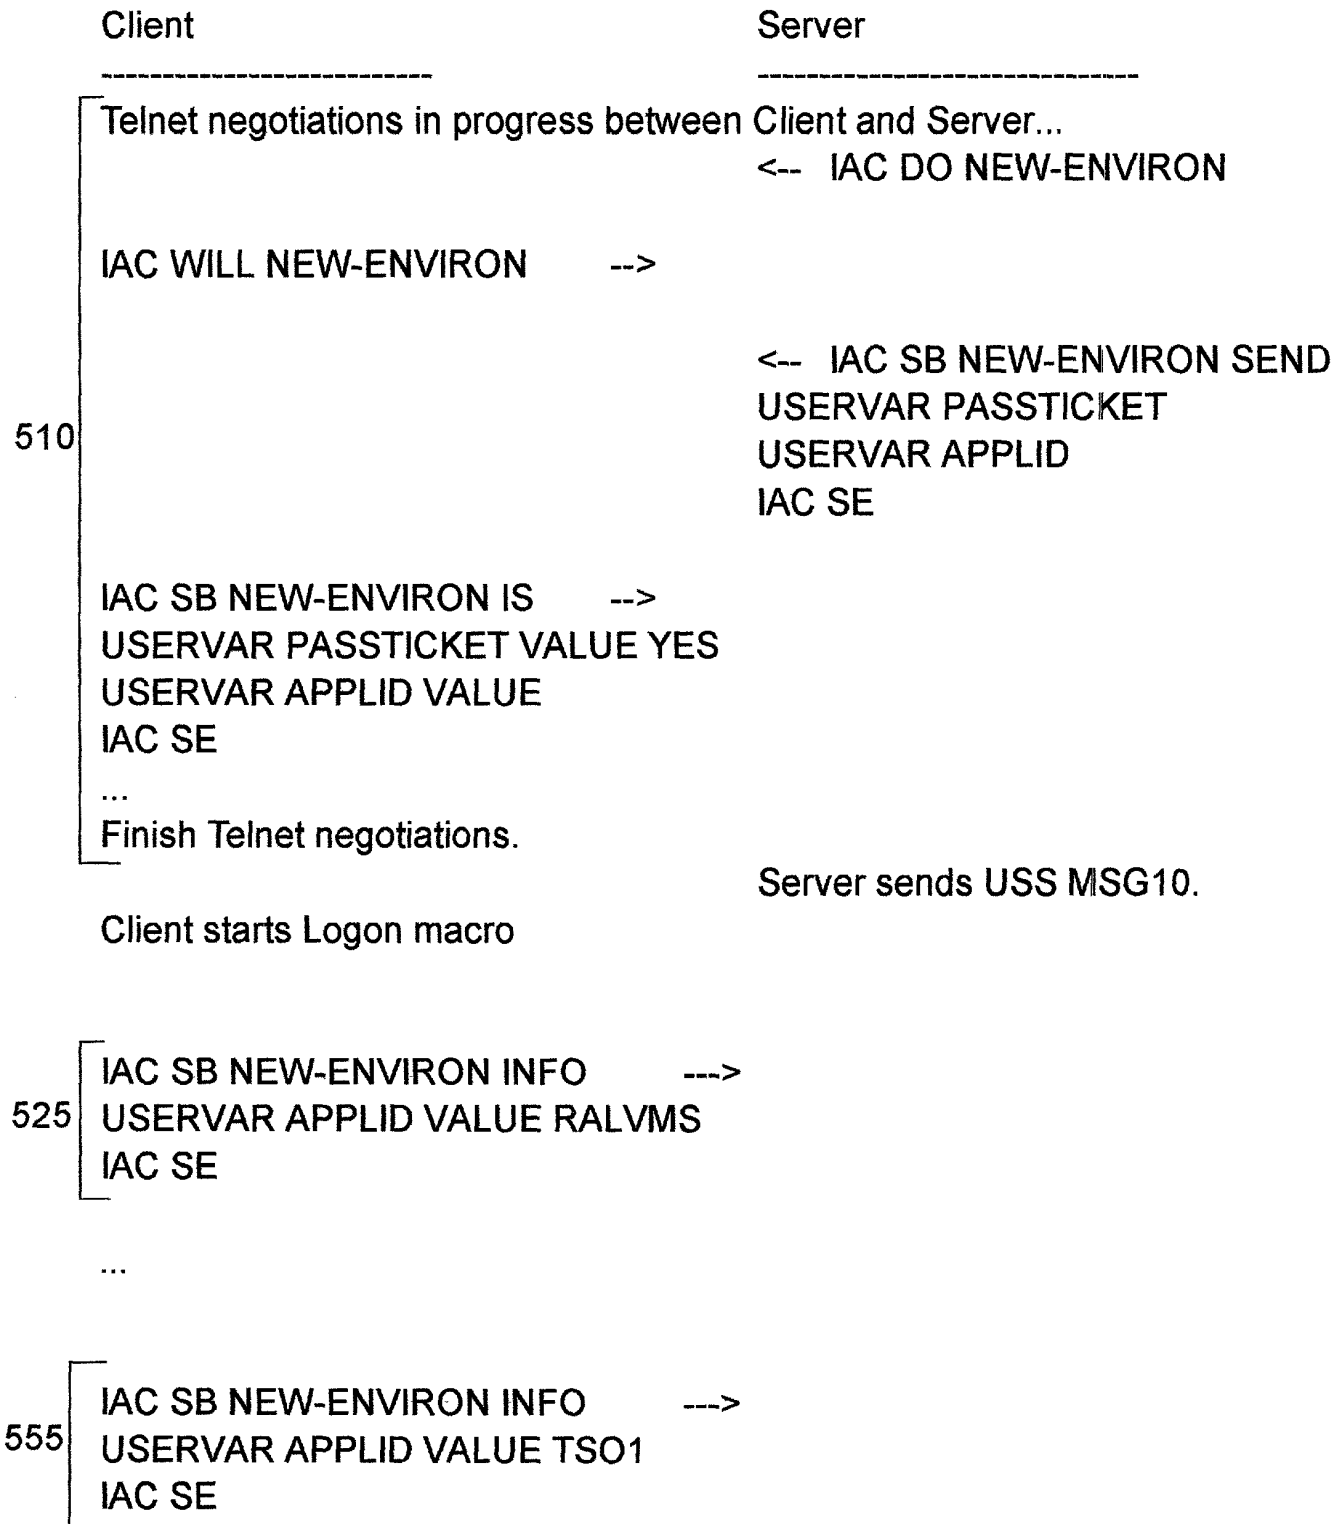

6
G
F

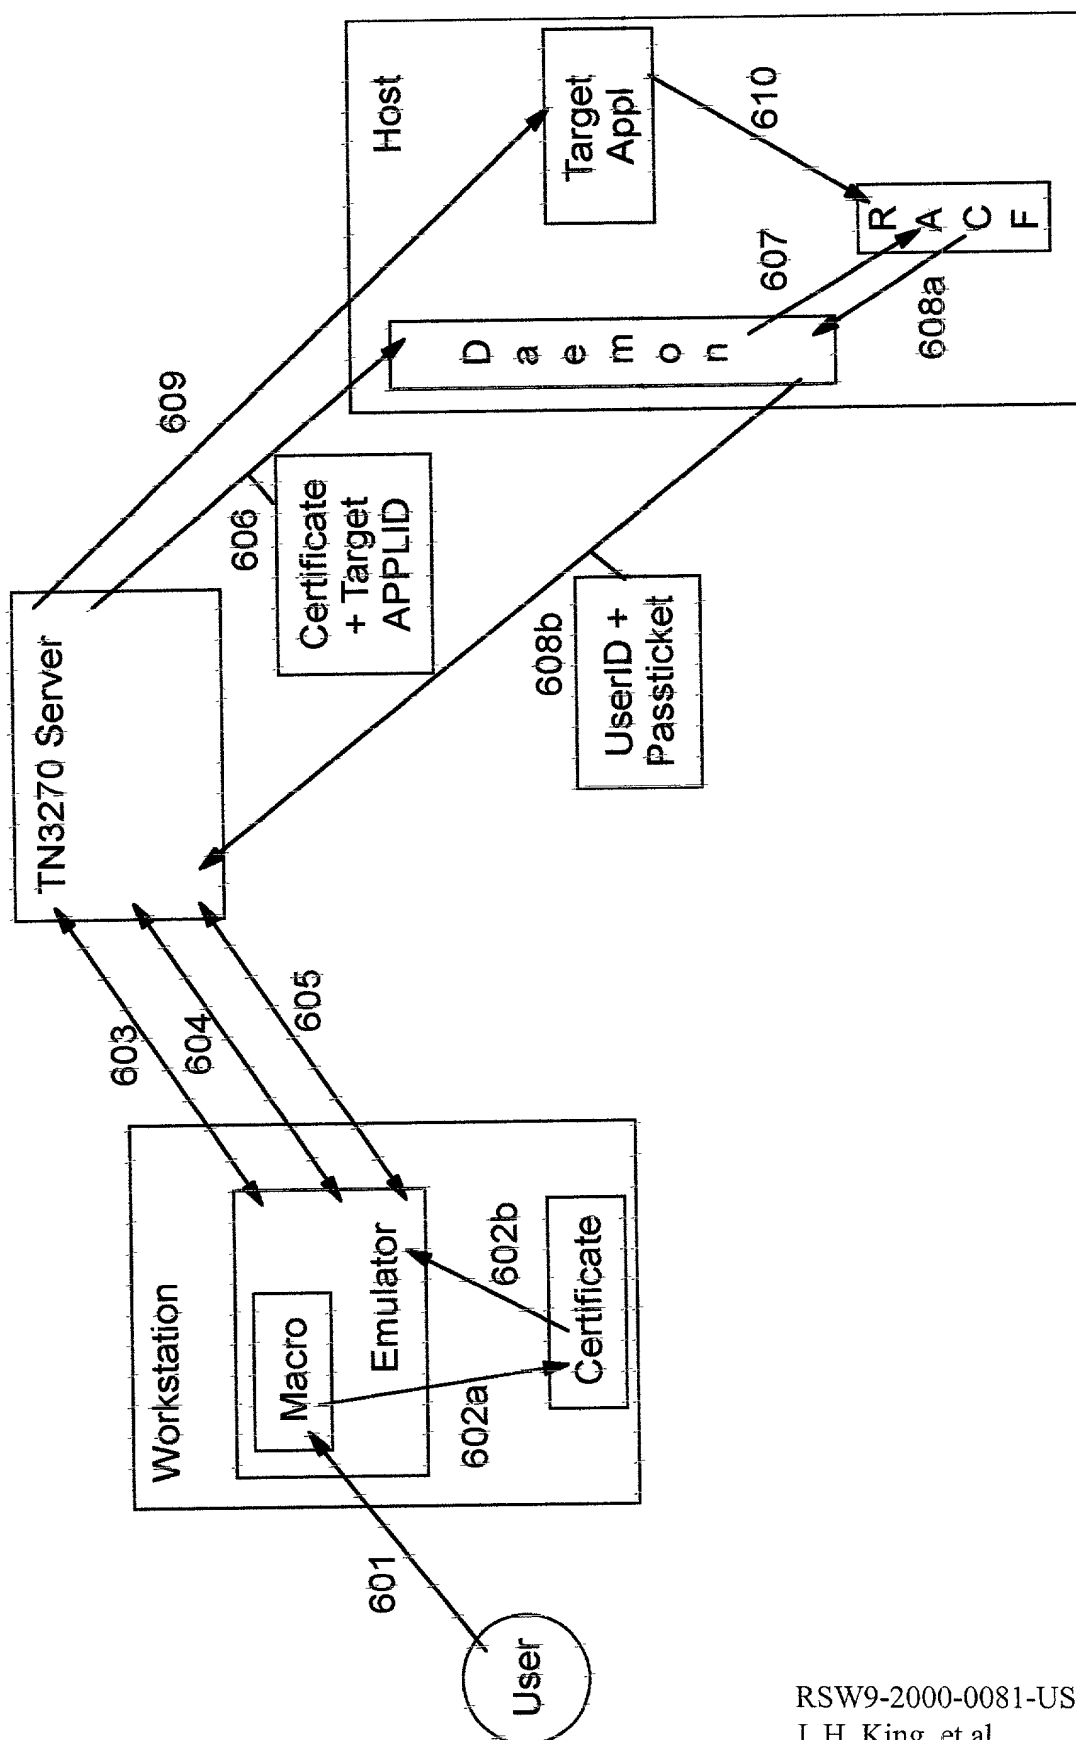


FIG. 7

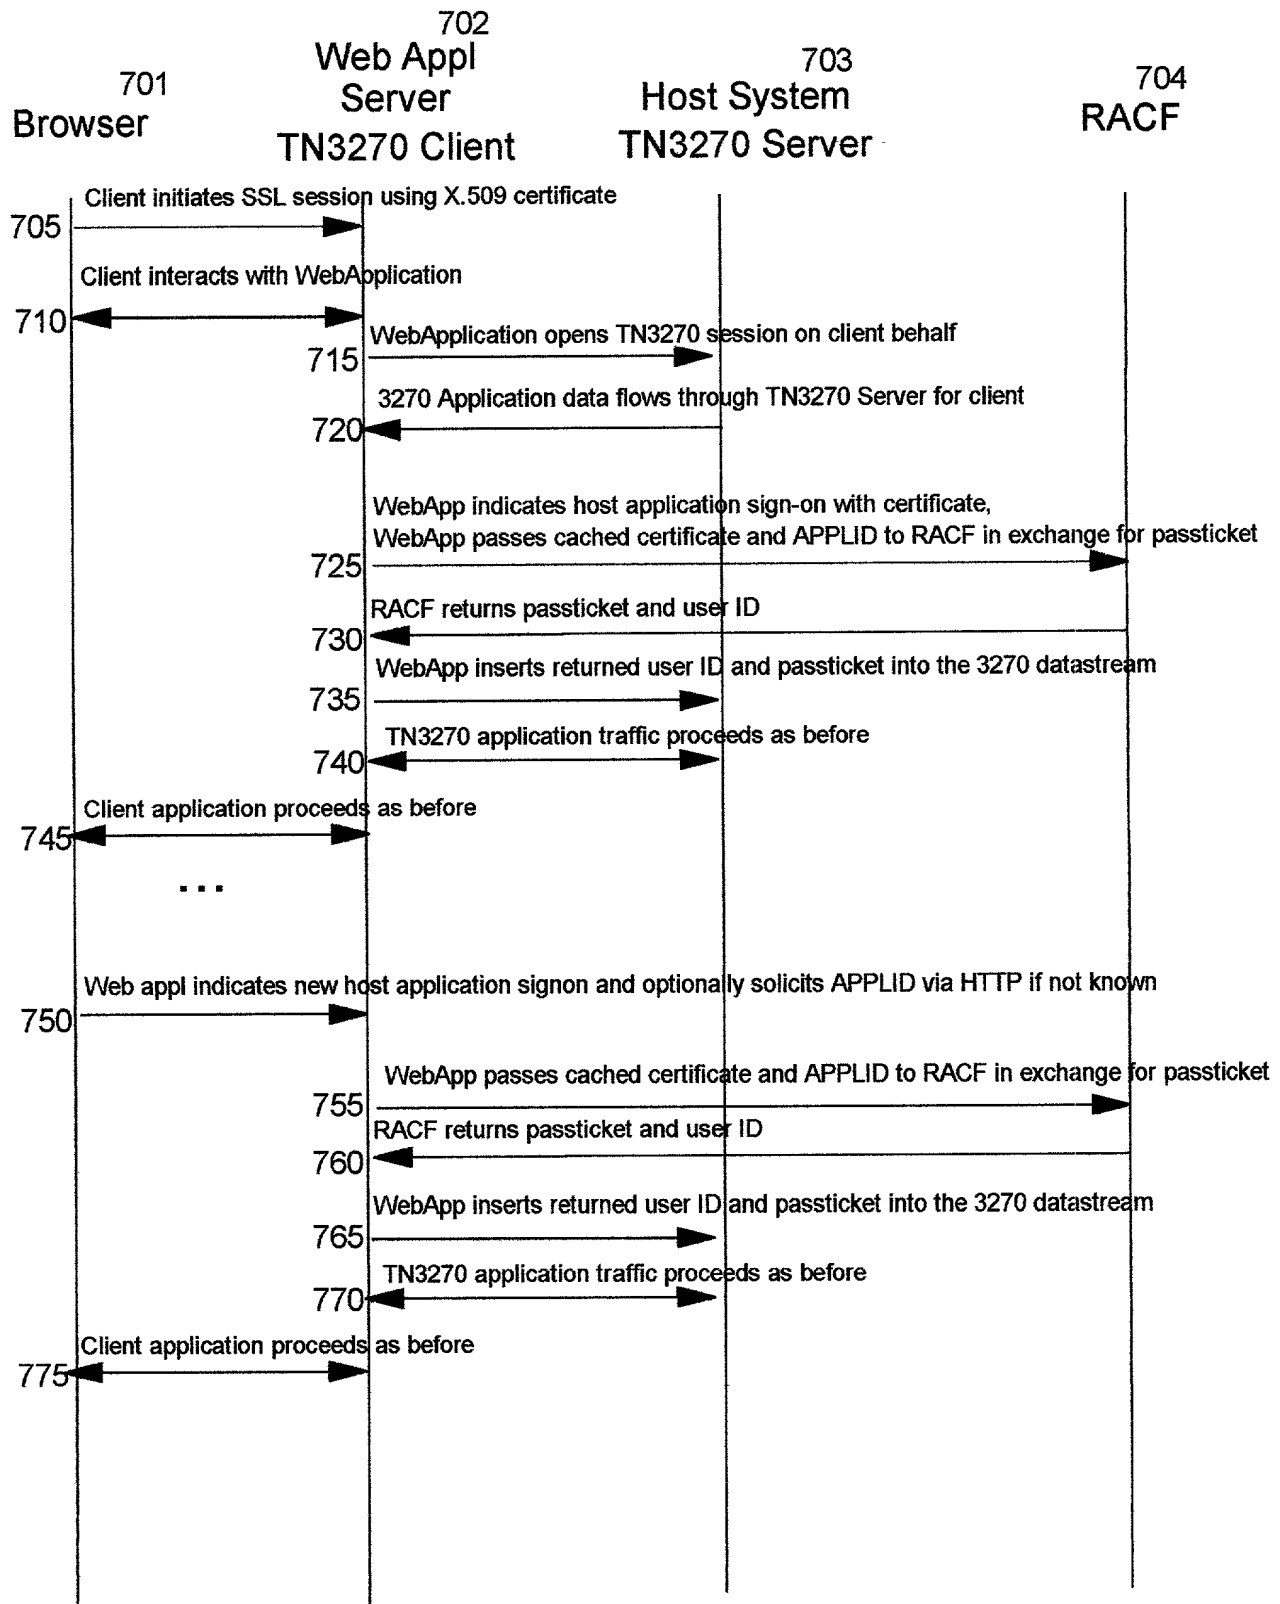


FIG. 8

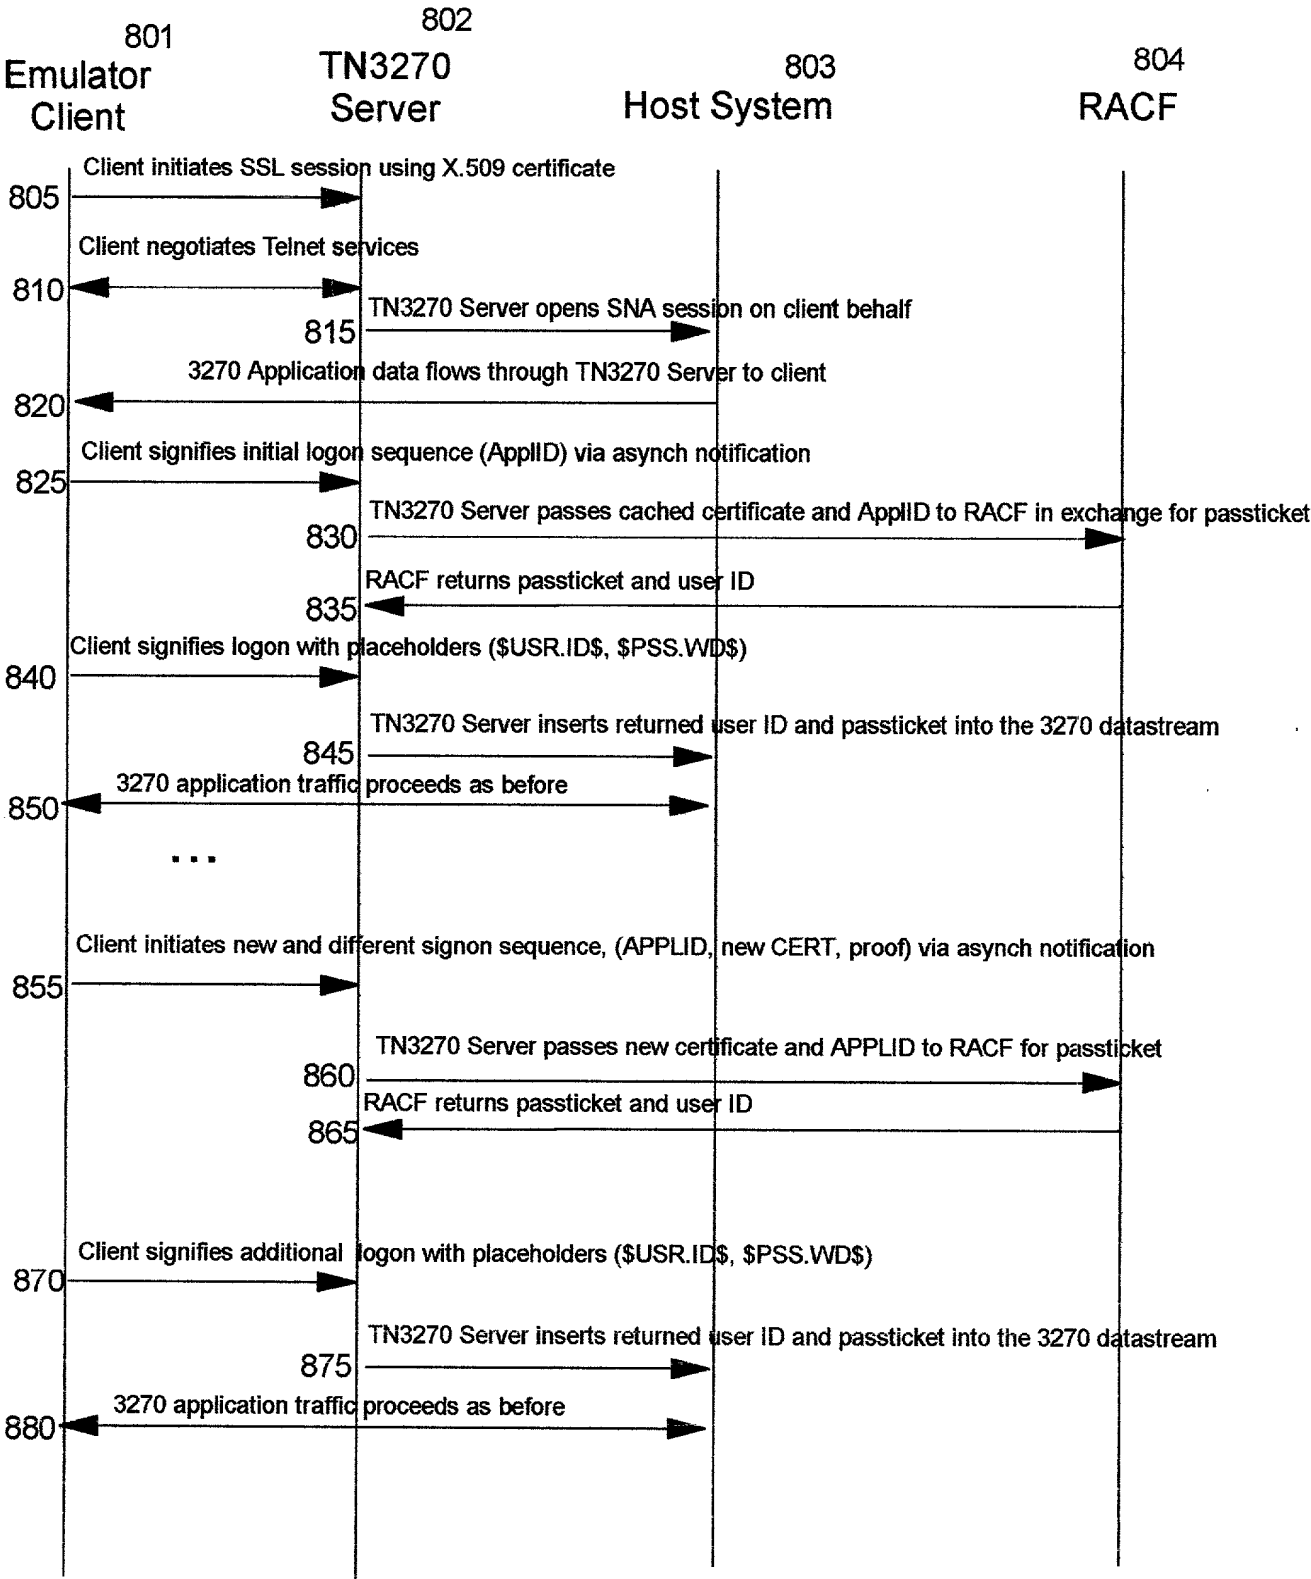


FIG. 9

Client

Server

Telnet negotiations in progress between Client and Server...

<-- IAC DO NEW-ENVIRON

IAC WILL NEW-ENVIRON -->

<-- IAC SB NEW-ENVIRON SEND
 USERVER PASSTICKET
 USERVER APPLID
 USERVER CERTIFICATE
 USERVER RSEEDRandomvalue
 USERVER AUTHINFO
 IAC SE

IAC SB NEW-ENVIRON IS -->
 USERVER PASSTICKET VALUE YES
 USERVER APPLID VALUE
 USERVER CERTIFICATE VALUE
 USERVER RSEEDRandomvalue VALUE
 USERVER AUTHINFO VALUE
 IAC SE

...

Finish Telnet negotiations.

Server sends USS MSG10.

Client starts Logon macro

IAC SB NEW-ENVIRON INFO --->
 925 USERVER APPLID VALUE RALVMS
 IAC SE

...

IAC SB NEW-ENVIRON INFO --->
 USERVER APPLID VALUE TSO1
 955 USERVER CERTIFICATE VALUE <certificate contents>
 USERVER AUTHINFO <random || sequence number || applid value>
 IAC SE

910
 925
 955

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**Technique for Handling Subsequent User Identification and Password
Requests with Identity Change Within a Certificate-Based Host Session**

the specification of which is identified by the attorney (IBM) Docket Number appearing above.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

<u>Number</u>	<u>Country</u>	<u>Day/Month/Year</u>	<u>Priority Claimed</u>
---------------	----------------	-----------------------	-------------------------

I hereby claim the benefit (a) under Title 35, United States Code, §119(e) of any U.S. application listed below and identified as a provisional application or (b) under Title 35, United States Code, §120 of any U.S. application listed below and not identified as a provisional application, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior U.S. application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application

Prior U.S. Applications

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
-------------------	--------------------	---------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Bruce A. Clay, Reg. No. 32,121; Gregory M. Doudnikoff, Reg. No. 32,847; Edward H. Duffield, Reg. No. 25,970; Jerry W. Herndon, Reg. No. 27,901; Gerald R. Woods, Reg. No. 24,144; Jeanine S. Ray-Yarletts, Reg. No. 39,808; Joseph C. Redmond, Jr., Reg. No. 18,753; John E. Hoel, Reg. No. 26,279; Christopher A. Hughes, Reg. No. 26,914; and Edward A. Pennington, Reg. No. 32,588;


AND also, Marcia L. Doubet, Reg. No. 40,999

Send all correspondence to: Jeanine S. Ray-Yarletts, IBM Corporation T81/062; PO Box 12195; Research Triangle Park, NC 27709.

First Inventor:

Julie H. King

Signature:

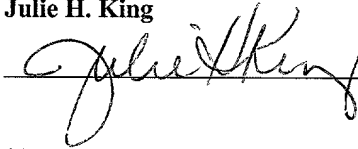

7-13-2000

Date

Residence: 8009 Papaya Drive, Raleigh, North Carolina 27613


Citizenship: United States of America

Post Office Address: same as residence

Second Inventor:

Susan D. Kirkman

Signature:



7-13-2000

Date

Residence: 204 Silvercliff Trail, Cary, North Carolina 27513

Citizenship: United States of America

Post Office Address: same as residence

Third Inventor:

Daniel J. Labrecque

Signature:

Daniel J. Labrecque

7/17/2000
Date

Residence: 107 Highstream Place, Chapel Hill, North Carolina 27516

Citizenship: United States of America

Post Office Address: same as residence

Fourth Inventor:

Linwood H. Overby, Jr.

Signature:

Linwood H. Overby, Jr.

7/13/2000
Date

Residence: 7252 Manor Oaks Drive, Raleigh, North Carolina 27615

Citizenship: United States of America

Post Office Address: same as residence

Fifth Inventor:

Steven Wayne Pogue

Signature:

Steven Wayne Pogue

7/17/2000
Date

Residence: 101 Eaglesham Way, Cary, North Carolina 27513

Citizenship: United States of America

Post Office Address: same as residence